


FITLOCK SYSTEMS

Established specialists in Riveting, Bolting & Threaded Insert Systems

GRIP-TAINER®
TOTAL CONFIDENCE

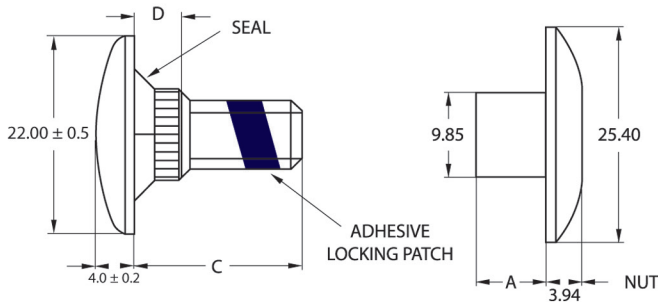

Bolt Dimensions

Part No	Seal	C	D
00B		14.00	5.50
0B		16.00	5.50
0B		16.00	5.50
0B		16.00	5.50
1B		19.05	6.60
1B		19.05	6.60
2B		22.20	6.60
2B		22.20	6.60
2B		22.20	6.60
3B		25.40	9.50
3B		25.40	9.50
3B		25.40	9.50
4B		31.75	9.50
4B		31.75	9.50
4B		31.75	9.50
4B		31.75	9.50
5B		38.50	12.30
5B		38.50	12.30
5B		38.50	12.30

Nut Dimensions

Part No	A
N0	7.00
N0	7.00
N1	9.52
N2	12.70
N1	9.52
N2	12.70
N2	12.70
N1	9.52
N2	12.70
N3	15.87
N1	9.52
N2	12.70
N3	15.87
N1	9.52
N2	12.70
N3	15.87
N4	25.80
N2	12.70
N3	15.87
N4	25.80

Grip Range

Min	Max
13.00	14.90
14.50	15.60
15.50	17.40
18.50	20.50
17.90	19.70
20.00	23.50
21.30	23.10
20.60	25.60
23.20	27.20
24.50	25.90
24.50	28.70
25.80	30.40
31.20	32.60
31.20	34.20
31.20	36.50
35.80	42.50
37.70	40.30
37.70	43.20
39.40	50.30

Features

- Controlled clamp
- No expensive tooling
- No waste material
- Reusable
- High specification plating
- Powder coated on request
- Plastic encapsulated heads on request
- Colour coded seals

GRIP-TAINER Technical Data

Recommended hole size:	10.3mm
Thread:	5/16 UNC
Shear strength:	14 Kn
Tensile strength:	20 Kn
Recommended assembly torque:	17-20 Nm
Drive bit:	T55

t: 0161 483 6220 f: 0161 456 4118 e: sales@fitlocksyste.ms.com

www.FitLocksystems.com