
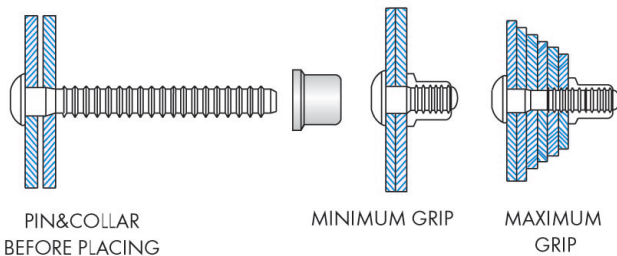


BOLTING SYSTEMS

The same applications as fastbolts but megaabolts have a wider grip range but a lower shear & tensile strength

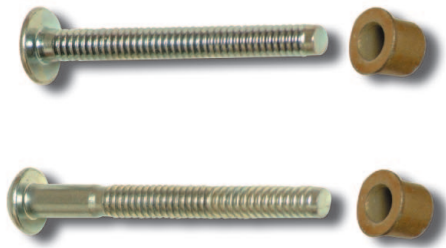

PIN RANGE

Part No	Grip Range	Head Dia	Recommended Hole Dia
MEG0610B	1.6-15.5	10.0	5.0
MEG0620B	7.9-31.5	10.0	5.0
MEG0610T	1.6-15.5	12.0	5.0
MEG0620T	7.9-31.5	12.0	5.0
MEG0810B	1.6-15.5	13.2	6.6
MEG0820B	7.9-31.5	13.2	6.6
MEG0810T	1.6-15.5	15.0	6.6
MEG0820T	7.9-31.5	15.0	6.6

90° CSK HEAD AVAILABLE UPON REQUEST

FINISH

PIN: Zinc plated to BS 1706

COLLAR: Zinc plated, Gold passivated and Waxed

PERFORMANCE DATA

SIZE	SHEAR STRENGTH(Kn)	TENSILE STRENGTH(Kn)
06(3/16")	8.20	10.00
08(1/4")	11.78	16.03

APPLICATIONS

Commercial vehicle body building, rail car building
sheet metal fabrication

COLLAR RANGE

PART NO.: MFCO600S(3/16")

MFCO800S(1/4")

INSPECTION DATA

DIA	A(Max)	B(Max)	C(Max)
4.8(3/16")	1.6mm	.80mm	1.25mm
6.4(1/4")	3.0mm	.80mm	2.50mm

